



### AC-HDMX 4x4


4 x 4 HDMI Matrix (4K v2.0)

Advance Connex HDMX 4x4 is 4 in 4 out true 4K HDMI matrix. It allows any source (Blue-Ray player, HD DVD player, satellite receiver, game system, etc.) to be shown on any of the four displays simultaneously. The HDMI matrix 4x4 has the ability of equalization and amplification to ensure HDMI signal's transmission through long cable without quality loss.

#### Features:


- HDMI 2.0 version (Support 4K@60Hz YUV4:4:4)
- Support 3D
- Bandwidth up to 18Gbps
- HDCP2.2 input, HDCP2.2 output
- HDCP1.4 input, HDCP1.4 output
- Support HDR10
- 4 x HDMI Input, 4 x HDMI output with 4 x SPDIF Audio
- Any one of the 4 Ultra HD sources to any one of the 4 Ultra HD displays
- Support Panel Button, Local IR, RS232 Control, IP Control, Web GUI Control
- Support Dolby True HD and DTS

#### Front Panel Description:

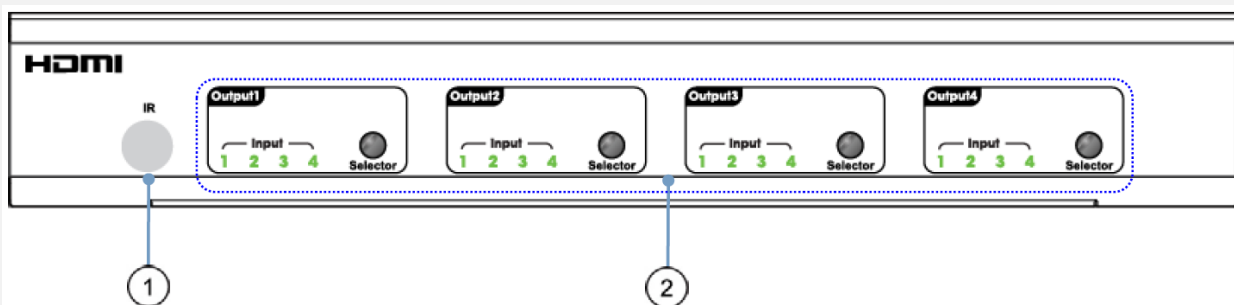

1. IR receiver window
2. Output video selection button

## Rear Panel Description:

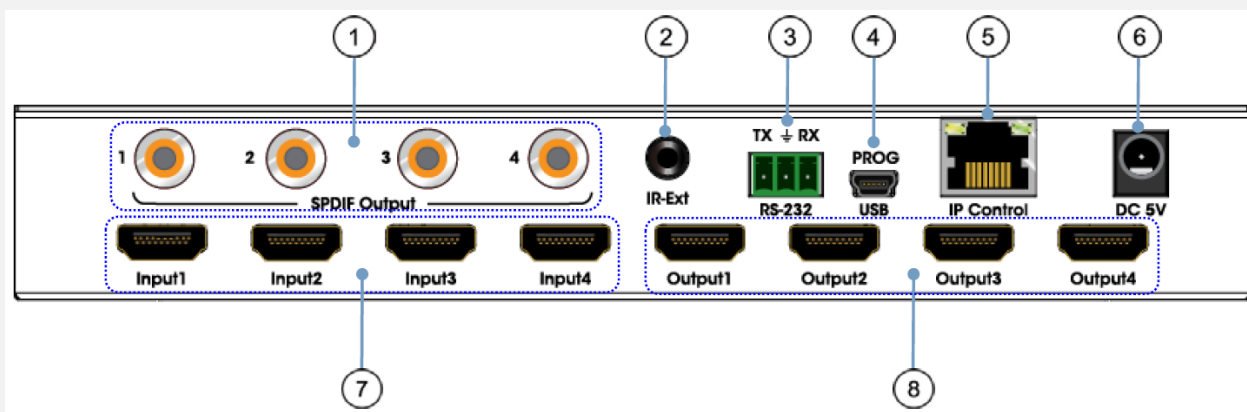


1. SPDIF Audio output
2. For IR external receiver cable
3. RS232 for control or upgrading the firmware
4. USB micro 5P port for upgrading the firmware
5. IP control
6. DC power input
7. HDMI input port
8. HDMI output port

## Specification:

Resolution	480p@60hz,576P@50hz,720P@60hz, 1080P@24hz,1080P@50hz,1080P@60hz,4K@24hz,4K@30hz, 4K@60hz YUV4:2:0, 4K@ 60hz YUV4:4:4
Video Input Connectors	4 x HDMI Type A, 19-pin, female
Video Output Connectors	4 x HDMI Type A, 19-pin, female
RS-232 serial port	3 PIN terminal block connectors
Ethernet port (IP control)	RJ45 female
IR Ext port	1 x 3.5mm stereo jack
Bandwidth	18 Gbps
Default IP	192.168.1.168
Rack-Mountable	Rack ears included
Dimensions	216 width X 105 dept X 34 height (mm)
Net Weight	0.72kg
Power consumption	13W (Max)
Operating Temperature	-4°F to 140°F (-20°C to 60°C)
Storage Temperature	-40°F to 158°F (-40°C to 70°C)

## Connection Diagram:

HDMI cable —  
 RS232 cable —  
 Cat5e/6 cable —  
 Audio cable —

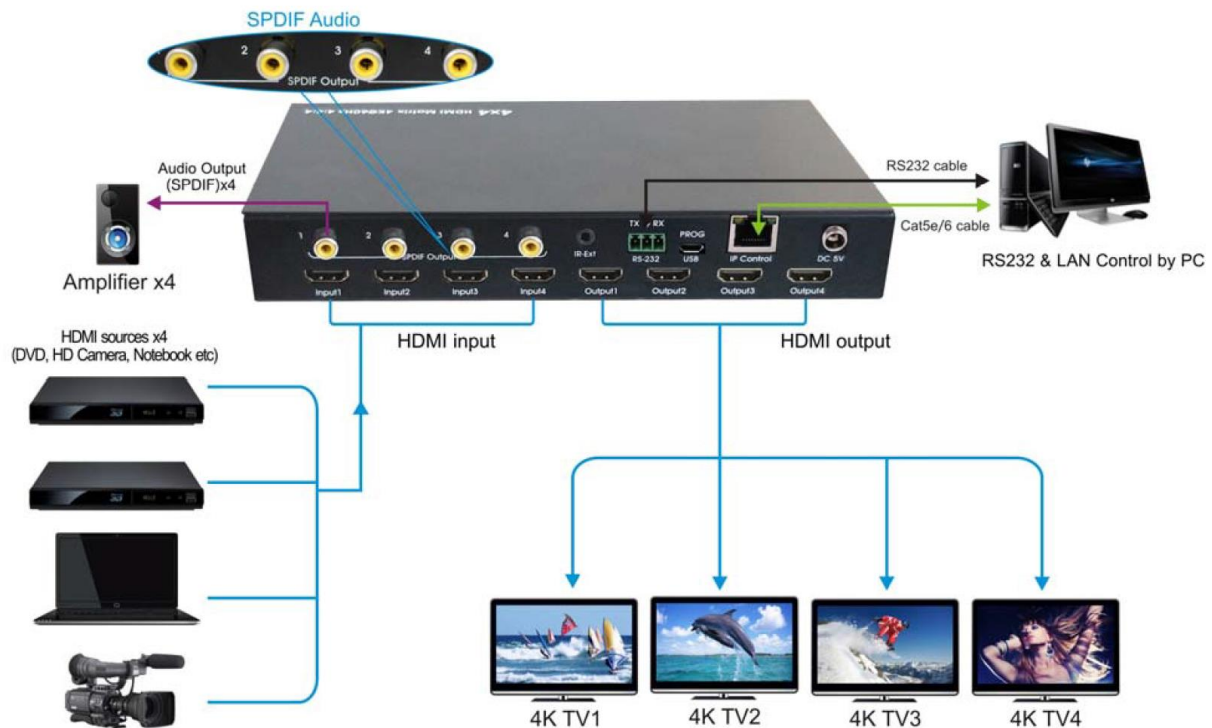

## Package Content:

HDMI Matrix	1 unit
Power adapter 5V	1 unit
User Manual	1 unit
Remote Control	1 unit
IR cable	1 unit
Mounting kits	1 pair
Rs232 Phoenix Plug	1 unit
Installation CD	1 unit